

Heavy vehicle specialist inspector's or manufacturing inspecting organisation's name (PRINT IN CAPS) **CHRIS CLARKE** ID **CJC**

Plate number (optional) **7A9D10014N2023169** VIN/chassis number

Make **DOMETT** Component being certified: Chassis Load anchorage

Model (optional) **D1001** Log bolsters Towing connection Brakes

Certification category **HVEK** SRT PSV stability PSV rollover

Swept path PBS

Description of work

**CERTIFY TO SCHEDULE 5 OF LTR 32015: NZ HEAVY VEHICLE BRAKE SPECIFICATION.
 CARRY OUT BRAKE CALCULATIONS, INSPECTION AND ECU END OF LINE PROTOCOL.
 4A TANKER
 FOR SYSTEM ARCHITECTURE, PLEASE REFER TO PDS WORKSHEET & SCHEMATIC.
 RSS ON TYRE: 265 70 R19.5**

Code/standard/rule certified to **LTR 32015, SCHEDULE 5** Component load rating(s) **26 Tonnes GVM**

General drawing number(s) **N/A** **15 Tonne (Front group ratings)
 15 Tonne (Rear group ratings)**

Supporting documents

BRAKE RULE CERTIFICATE LC220902

BRAKE CALCULATION # 2022 SAF 4A WPC

Special conditions (optional)

WARNING LAMP MUST ILLUMINATE WHEN IGNITION IS SWITCHED ON & THEN EXTINGUISH IMMEDIATELY OR WHEN VEHICLE SPEED EXCEEDS 7 KM/H

Certification expiry date (if applicable) **N/A (UNLESS MODIFIED)** Hubodometer reading (whichever comes first) **OR**

Declaration

I the undersigned, declare that I am the heavy vehicle specialist inspector identified and I hold a current valid appointment. I certify that the above mentioned vehicle component's design, manufacture and installation, and this certification complies in all respects with the Land Transport Rule - Vehicle Standards Compliance 2002 and my appointment. To the best of my knowledge the information contained in the certificate is true and correct.

Designer's ID (if different from inspector below) **LANCE CAWTE** L P C

Inspector's signature 

Inspector's name (PRINT IN CAPS) **CHRIS CLARKE** ID number **CJC**

Date **08.09.2022** Number **837736**

CoF vehicle inspector ID (if available) **[REDACTED]** CoF vehicle inspector signature (if available) **[REDACTED]** Date **[REDACTED]**

All fields are mandatory unless otherwise stated.

WABCO

START-UP LOG


System	Trailer EBS-E	WABCO part number	480 102 080 0
Production date	2022-06-27	Serial number	897041897600K
Serial number (modulator)	000000555431		
Fingerprint Customer EOL / Customer Development / Flash Program	W503643 / 2022-09-09 ; 00000000 / 0000-00-00 ; 00000000 / 0000-00-00		

WABCO

TRAILER EBS-E

GGV/ADR TÜEH TB 2007 - 019.00
361 071 04

HERSTELLER FABRIKANTEN CAUS/FABRIKANTEN	DOMETT		
TRUCK EBSY NUMBER CHASSIS NUMBER NUMERO DE CHASSIS	4A TANKER, D1001 7A9D10014N2023169		
PARADESCRIPCIONES DE BRAKE CALCULATION NO. CALCUL DE FREINAGE NO.	TP2022A		
POLE PADDAMNEZAH, c-d e-d POLE WHEEL, TEETH, c-d e-d DENTS ROUE, DENTURE, c-d e-d	90	90	ABS-System ABS-System Systeme ABS
RSS Single Tire Monte simple			4S/3M
RSS Zwillingssteuerung Youn Tire Youn Tire Youn Tire	X		
Einbaueinstellung Steering axle		Leitachse Essen vreur	
Subsystems	I/O	24N	



ACHSE AXLE ESSEN	pm (bar)	6.5	pm (bar)	0.8	2.0	6.5	pz	TYPE	(mm)	(mm)	(bar)			
											1.0	Pz		
1	1400	0.5	1.6	7500	4.5	0.4	1.5	---	6.1	-	20	74	472	4202
2	1400	0.5	1.6	7500	4.5	0.4	1.5	---	6.1	-	20	74	472	4202
3	1200	0.4	1.3	7500	4.5	0.4	1.6	---	5.3	-	16 / 24	64	74	420
4	1200	0.4	1.3	7500	4.5	0.4	1.6	---	5.3	-	16 / 24	64	74	420
5	0	---	---	---	---	---	---	---	---	---	---	---	---	---

TEBS-E

Diagnostic memory	OK	Warning lamp control	OK
Parameter setting	carried out	Stop light supply	OK
EBS pressure test	OK	Lifting axle test	Not tested
Redundancy test	OK	ECAS height sensor calibration	Not tested
ABS sensor assignment	OK	Height sensor axle load	Not tested
RTR test	Not tested	Leak test	Not tested
Immobilizer test	Not tested	Signal outputs	Not tested
Signal inputs	Not tested	Tag axle test	Not tested

Electronic Extension Module

Diagnostic memory	Not tested	Signal outputs	Not tested
TailGUARDlight	Not tested	TailGUARD	Not tested
Manufacturer	DOMETT	Vehicle ident. no.	7A9D10014N2023169
Vehicle type	4A TANKER, D1001	Odometer reading	10.9 km
Next service	0 km	Trip reading	10.9 km
Tester	Chris Clarke	Signature	
Date	2022-09-09 1:44:51 pm		

distribution: DOMETT
 2022 ROR 4A WPC

Please note!

This brake calculation is made under consideration of
 -the legal prescriptions mentioned above in the version valid
 at the time of making the program (V6.18.07.12).
 -the functional characteristics of our products
 as well as the data of the brake out of the test
 approvals of the axle manufacturers, and
 -the other vehicle data included in the brake calculation.
 Please check whether these data correspond to the actual vehicle data.
 Our conditions of delivery apply (particularly section 9.0).
 In any case we comment to do a braking harmonisation!
 WABCOBrake V6.18.07.12 db 31.08.2018

vehicle manufacturer: DOMETT
 trailer model : 4A TANKER, D1001
 trailer type : 4-axle-full-trailer
 remarks : air / hydraulic / VA suspension
 WABCO TRAILER - EBS
 TRISTOP 3+4: T.16/24
 265/70 R 19,5

axle 1 + 2 + 3 + 4 : Assali Stefen, K, 361-071-04 ECE Re 432,

		<u>unladen</u>	<u>laden</u>
total mass	P	5200	30000
axle 1	P1	1400	7500
axle 2	P2	1400	7500
axle 3	P3	1200	7500
axle 4	P4	1200	7500
wheel base	E	5070	
centre of gravity height	h	700	1492

	<u>axle 1</u>	<u>axle 2</u>	<u>axle 3</u>	<u>axle 4</u>
no. of combined axles	1	1	1	1
no. of brake chambers per axle line	2	2	2	2
The power output corresponds to	BZ 122.1	BZ 122.1	BZ 119.6	BZ 119.6
brake chamber manufacturer	Meritor	Meritor	Meritor	Meritor
chamber size	20.	20.	T.16/24	T.16/24
lever length	74	74	74	74
brake factor	20.26	20.26	20.26	20.26
dyn. rolling radius	421	421	421	421
dyn. rolling radius	rdyn max	421	421	421
threshold torque	Co	7.0	7.0	7.0

calculation:

chamber pressure(rdyn min)	pH at z=22, 5%bar	2.4	2.4	2.3	2.3
chamber pressure(rdyn max)	pH at z=22, 5%bar	2.4	2.4	2.3	2.3
chamber press.(servo)	pcha at pm6, 5bar	6.1	6.1	5.3	5.3
piston force	ThA at pm6, 5bar	7071	7071	5304	5304
brake force(rdyn min)	T lad. at pm6, 5bar	50425	50425	37841	37841
brake force(rdyn max)	T lad. at pm6, 5bar	50425	50425	37841	37841
Brake force incl. 1 % rolling resistance proportion	%	26.7	26.7	23.3	23.3

braking rate z laden 0.600 for rdyn min
 z = sum (TR)/PRmax 0.600 for rdyn max

Trailer may only be operated in combination with trucks/tractors with ISO 7638 supply (5 or 7 polar).

brake diagram :

maximum pressure: 8.5 bar

axle 1:

valve 1: 480 207 0.. 0 WABCO or 480 207 2.. 0
EBS relay valve

brake cylinder: Meritor 20HSCLD65

axle 2:

valve 1: 480 207 0.. 0 WABCO or 480 207 2.. 0
EBS relay valve

brake cylinder: Meritor 20HSCLD65







axle 3:

valve 1: 480 102 ... 0 WABCO
EBS trailer modulator

brake cylinder: Meritor 1624HTTD64

axle 4:
valve 1: 480 102 ... 0 WABCO
EBS trailer modulator
brake cylinder: Meritor 1624HTLD64

test type III	(zIII = 0.30)	for rdyn min :	axle1	axle2	axle3	axle4
at pm 3.6 bar =>		pcha in bar :	3.1	3.1	2.9	2.9
test type III	(zIII = 0.06)	for rdyn min :	axle1	axle2	axle3	axle4
at pm 1.3 bar =>		pcha in bar :	0.9	0.9	0.9	0.9

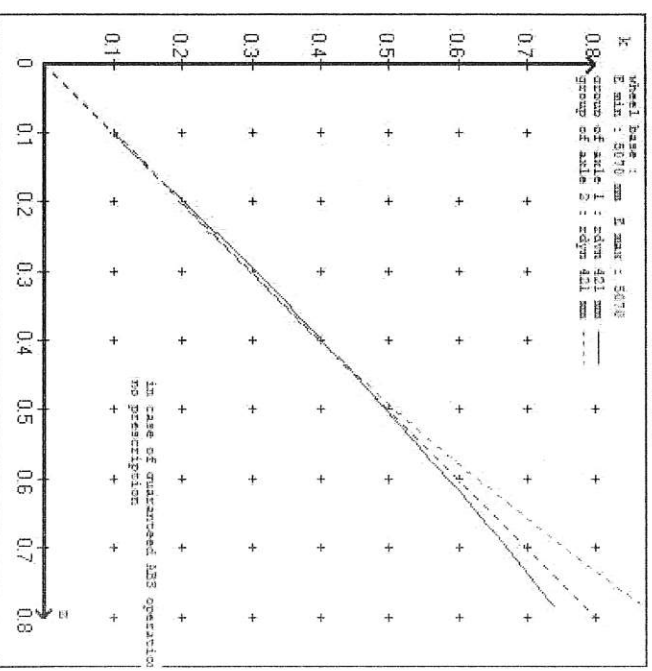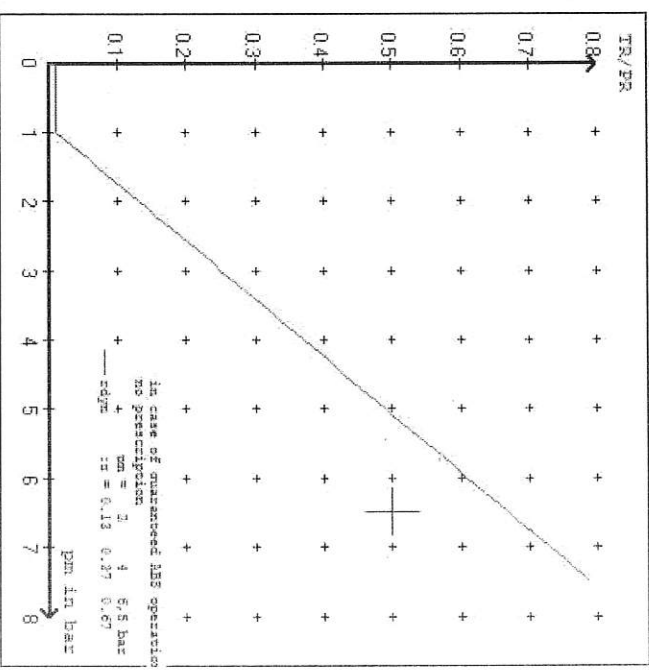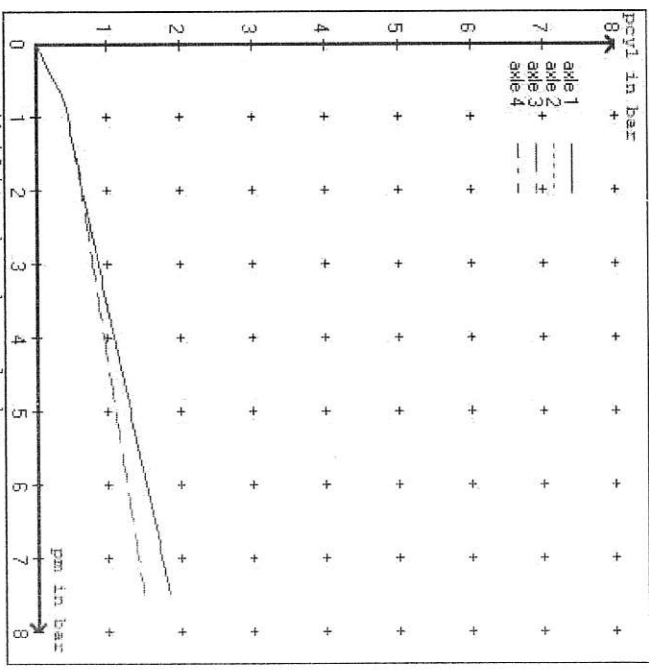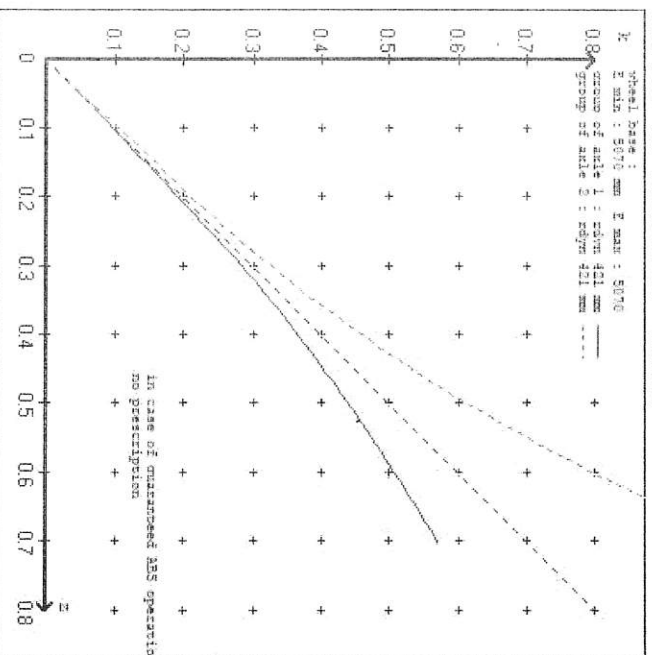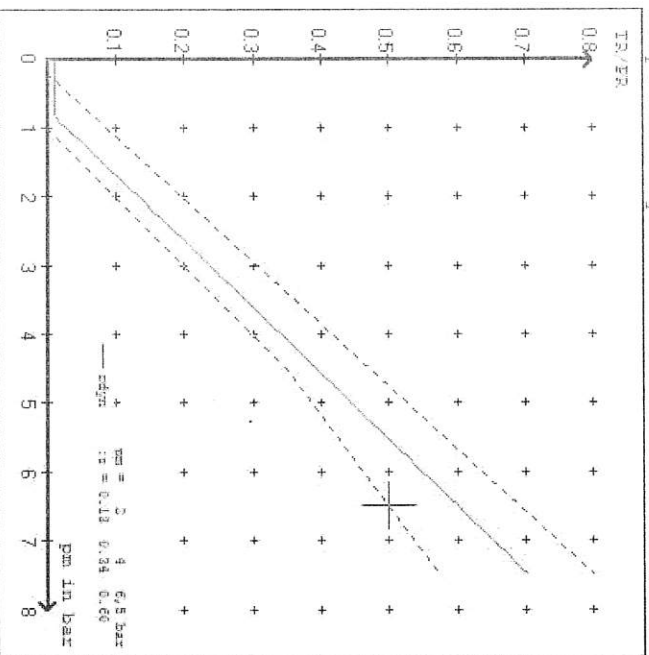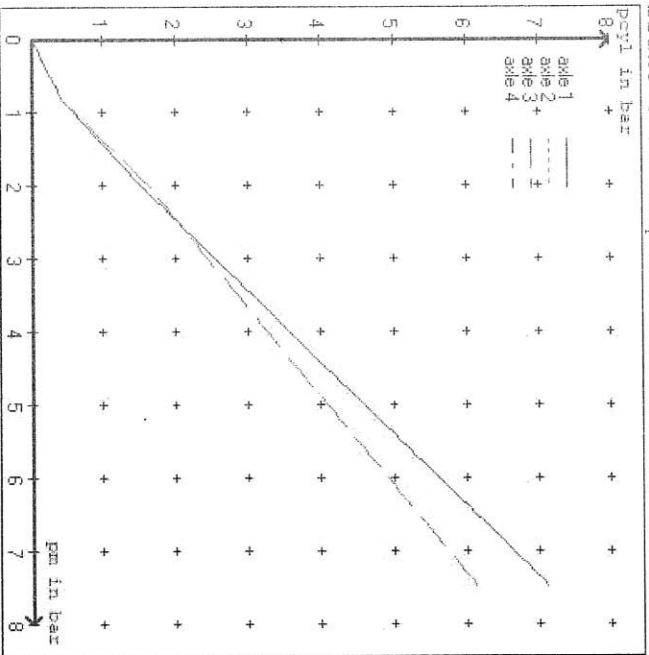

vehicle manufacturer: DOMETT
 trailer model : 4A TANKER, D1001
 trailer type : 4-axle-full-trailer

brake chamber and lever length :
 axle 1 : 2 x type/diameter 20. (Meritor) lever length 74 mm
 axle 2 : 2 x type/diameter 20. (Meritor) lever length 74 mm
 axle 3 : 2 x type/diameter T.16/24 (Meritor) lever length 74 mm
 axle 4 : 2 x type/diameter T.16/24 (Meritor) lever length 74 mm

brake diagram :

valve :
 480 207 0.. 0 WABCO EBS relay valve or 480 207 2.. 0
 480 102 ... 0 WABCO EBS trailer modulator

EBS input data

=====
 vehicle manufacturer: DOMETT
 trailer model : 4A TANKER, D1001
 trailer type : 4-axle-full-trailer
 brake calculation no. : TP 2022A

tire circumference main axle : 2650 for rdyn max
 tire circumference auxiliary axle : 2650 for rdyn max

assignment pm / deceleration z: pm 0.8 bar z = 0.010
 2.0 bar z = 0.134
 (laden condition) 6.5 bar z = 0.600

axle	control pressure pm		brake pr. unladen	axle load laden	control pressure pm		brake pr. laden	6.5
	axle load unladen	bellow pr. unladen			bellow pr. laden	brake pr. laden		
1	1400	to be	1.6	7500	to be	0.4	1.5	6.1
2	1400	entered by	1.6	7500	entered by	0.4	1.5	6.1
3	1200	the vehicle	1.3	7500	the vehicle	0.4	1.6	5.3
4	1200	manufact.	1.3	7500	manufact.	0.4	1.6	5.3
5	0		0,0	0		0,0	0,0	0,0

The unladen values indicated in the above table are values for the basic parameter set. Higher unladen axle loads and liftaxles are automatically recognized and do not require separate adjustment. The above unladen axle loads must not be fallen below.

=====
 axle 1 axle 2 axle 3 axle 4
 axle load pcyl axle load pcyl axle load pcyl axle load pcyl
 1400 1.6 1400 1.6 1200 1.3 1200 1.3
 1900 2.0 1900 2.0 1700 1.6 1700 1.6
 2400 2.3 2400 2.3 2200 1.9 2200 1.9
 2900 2.7 2900 2.7 2700 2.3 2700 2.3
 3400 3.1 3400 3.1 3200 2.6 3200 2.6
 3900 3.4 3900 3.4 3700 2.9 3700 2.9
 4400 3.8 4400 3.8 4200 3.2 4200 3.2
 4900 4.2 4900 4.2 4700 3.5 4700 3.5
 7500 6.1 7500 6.1 7500 5.3 7500 5.3

data sheet to ECE vehicle type-approval certificate concerning braking
equipment: according to ECE R13 annex 11

axle 1 : reference axle: Assali SteftM or LM or LCen		brake lining: ROR 8616 AF (M13)
test report :	361-071-04 ECE Re 432	date : GA310709
axle 2 : reference axle: Assali SteftM or LM or LCen		brake lining: ROR 8616 AF (M13)
test report :	361-071-04 ECE Re 432	date : GA310709
axle 3 : reference axle: Assali SteftM or LM or LCen		brake lining: ROR 8616 AF (M13)
test report :	361-071-04 ECE Re 432	date : GA310709
axle 4 : reference axle: Assali SteftM or LM or LCen		brake lining: ROR 8616 AF (M13)
test report :	361-071-04 ECE Re 432	date : GA310709

calc. verif. of residual (hot) braking force type III

(item 4.2.1 of appendix 2 to annex 11)

axle 1	(rdyn 421 mm)	T = 22.7 % Fe
axle 2	(rdyn 421 mm)	T = 22.7 % Fe
axle 3	(rdyn 421 mm)	T = 18.2 % Fe
axle 4	(rdyn 421 mm)	T = 18.2 % Fe

calculated actuator stroke in mm

(item 4.3.1.1 of appendix 2 to annex 11)

axle 1	(sp = 58 mm)	s = 38 mm
axle 2	(sp = 58 mm)	s = 38 mm
axle 3	(sp = 57 mm)	s = 38 mm
axle 4	(sp = 57 mm)	s = 38 mm

average thrust output in N at pm = 6,5 bar (however max. pcha = 7,0 bar)

axle1	ThA = 7071 N
axle2	ThA = 7071 N
axle3	ThA = 5304 N
axle4	ThA = 5304 N

calc. residual (hot) braking force in N
(item 4.3.1.4 of appendix 2 to annex 11)

axle 1	(rdyn 421 mm)	T = 43214 N
axle 2	(rdyn 421 mm)	T = 43214 N
axle 3	(rdyn 421 mm)	T = 32459 N
axle 4	(rdyn 421 mm)	T = 32459 N

basic test type III
of subject (calculated)
trailer (E) residual

braking rate of the vehicle (hot)braking
(item 4.3.2 to appendix 2 to annex 11) 0.60

required braking rate
(items 1.5.3 and 1.7.2 to annex 11) >= 0,4 and
>= 0,6*E (0.36)

axle 1	(rdyn 421 mm)	T = 43214 N
axle 2	(rdyn 421 mm)	T = 43214 N
axle 3	(rdyn 421 mm)	T = 32459 N
axle 4	(rdyn 421 mm)	T = 32459 N

basic test type III
of subject (calculated)
trailer (E) residual

braking rate of the vehicle (hot)braking
(item 4.3.2 to appendix 2 to annex 11) 0.60

required braking rate
(items 1.5.3 and 1.7.2 to annex 11) >= 0,4 and
>= 0,6*E (0.36)

spring parking brake

	axle 3	axle 4
no of TRISTOP-actuators per axle	2	2
TRISTOP-actuator type	T.16/24	T.16/24
Lever length	74	74
stat. tyre radius	401	401
at a stroke of	s	in mm
min. force of spring brake	TFZ in N	7605
sp.brake chamber no	Meritor.....	4
release pressure	pls in bar	4.8

calculation:

ratio until road		
IFB = $1Bh \cdot E_{ta} \cdot C \cdot r_{Bt} / (r_{Bn} \cdot r_{stat})$	3.7388	3.7388
for rstat	in mm	401
brake force of spring br. TF	in N	56159
TF = $(TFZ \cdot KDZ - 2 \cdot C_0 / 1Bh) \cdot i_{IFB}$		56159
braking rate	zf laden	0.392
zf = $\text{sum}(TF) / P + 0,01$		

Test of the frictional connection required by the parking brake

minimum wheelbase/minimum supporting width min Ef necessary
to fulfil the regulations

$$\min Ef = E \cdot (1 - PR/P + zferf \cdot h/E) / (1 - zferf / (fzul \cdot nf/ng))$$

min Ef =	3617 mm	for E =	5070 mm
min Ef =	3617 mm	for E =	5070 mm

min Ef =	minimum distance between front axle(s) (trailer) or support (semitrailer)
and the rear axle(s) (resultant of the bogie)	
E =	wheel base
fzul =	0.80 maximum permissible frictional connection required
zferf =	0.18 maximum required braking ratio of the parking brake
h =	1492 mm height of center of gravity - laden
PR =	15000 kg maximum bogie mass - laden
P =	30000 kg maximum total mass - laden
nf =	2 no. of axle(s) with TRISTOP spring brake actuators
ng =	2 no. of bogie axle(s)


reference values

reference values for z = 50% for max rdyn: 421 mm

	pz [bar]	T [N]	T [N]
axle 1	1.0 6.1	4729 42021	
axle 2	1.0 6.1	4729 42021	
axle 3	1.0 5.3		4200 31534
axle 4	1.0 5.3		4200 31534

VIN - no.:

	Axle(s) / Achse(n)			
brake cylinder type (service / parking)	20./	20./	T.16/24	T.16/24
Bremszylinder Typ (Betrieb / Rest)				/
Maximum stroke smax = ...mm	65	65	64	64
maximaler Hub smax = ...mm				
Lever length = ...mm	74	74	74	74
Hebellänge = ...mm				

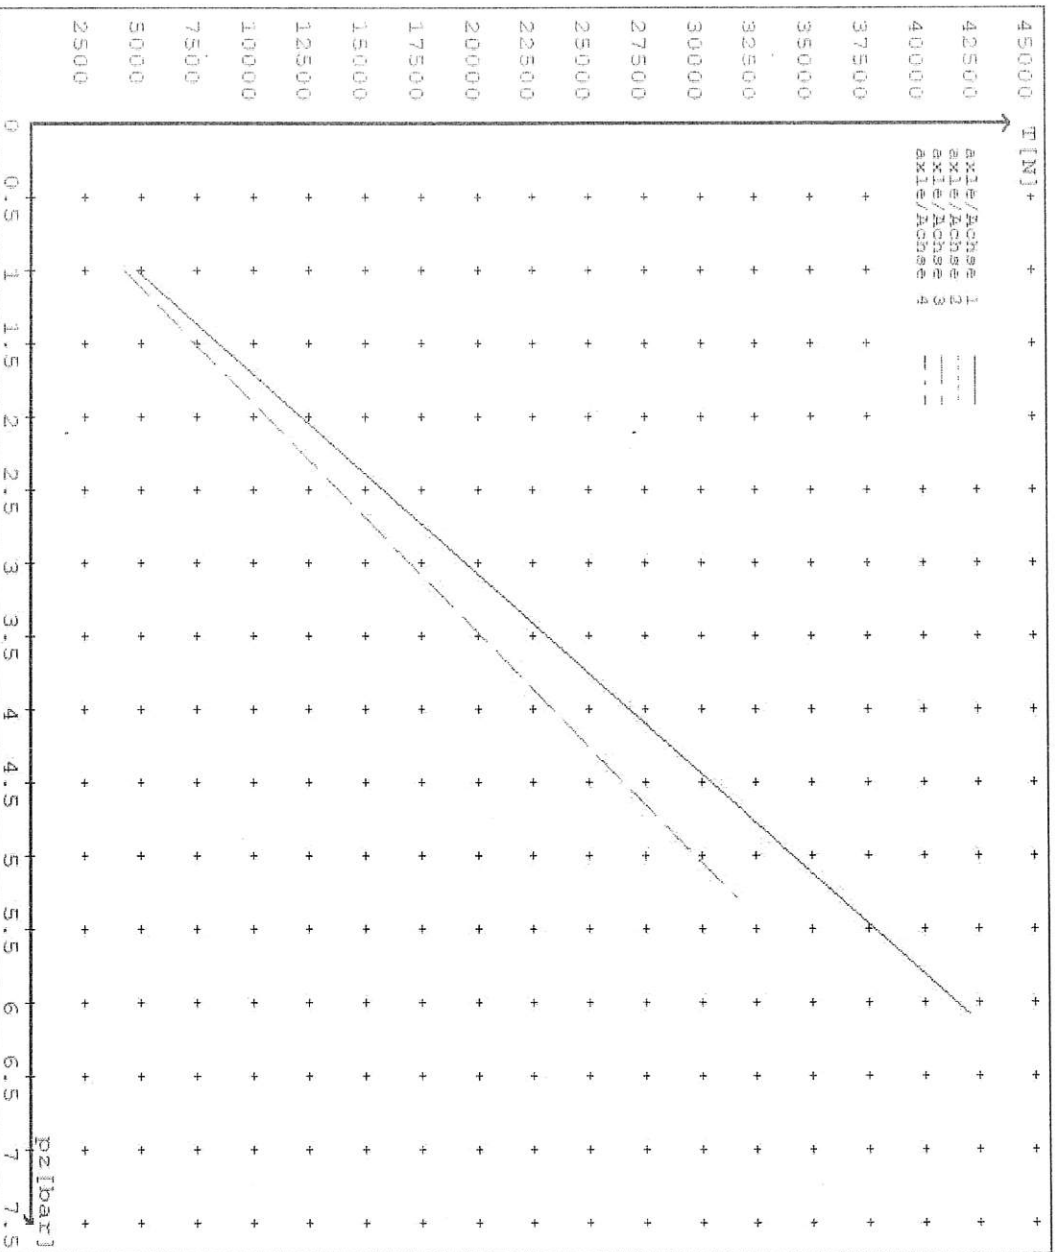



**NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015
WORKSHEET, PROCEDURE DOCUMENTATION SHEET
& CONFIRMATION OF COMPLIANCE**

CLIENT

MANUFACTURER:	DOMETT TRAILERS
ADDRESS:	Taurikura Drive, Tauranga 3110
FLEET:	FONTERRA

VEHICLE DETAILS

VEHICLE TYPE:	4A TANKER	CERT #:	LC220902
YEAR:	2022	CALCULATION #:	2022 SAF 4A WPC
MAKE:	DOMETT	REGO #:	
MODEL:	D1001	LT400 #:	837736
CHASSIS #:	2169	ORDER #:	8859
VIN #:	7A9D10014N2023169		
GVW: t	26	PRIME MOVER:	EBS / EUROPEAN

LOAD CONFIGURATION:

UNIFORM DENSITY

GROUP RATINGS: t

FRONT	15	REAR	15
--------------	----	-------------	----

WHEEL BASE: m

5.07

UNLADEN COG m

0.7

MAX HEIGHT m

2.38

HEIGHT DECK m

1.00

COG: m

1.492

TARE: t

2.8

2.4

TOTAL
5.2

TYRE SIZE:

FRONT
265 70 R19.5

REAR
265 70 R19.5

FITTED
265 70R 19.5

ROLLING CIRCUMFERENCE: MM

2645

2645

AXLE SPACING: m

1.3

1.3

BRAKE & AXLE DETAILS

	MAKE	MODEL	TEST REPORT
AXLE:	ROR_ASSALI_STEFEN	ROR-SLX9 LRC DISC	361-071-04
POLE WHEEL FRONT:	90	POLE WHEEL REAR:	90
LINING MATERIAL:	ROR 8616	BRAKE FACTOR:	20.26
SENSED AXLES:	NOTES:		
SERIAL NUMBERS:	1 + 3	1	
		2	
		3	
		4	
		5	

CHAMBERT AND VALVING DETAILS

	AXLE 1 & 2	AXLE 3 & 4	AXLE 5
CHAMBERS:	HALDEX_CHAMBERS	HALDEX_BERTOCCO	N/A
BRAND:	20, (125 200)	1624 (342,162,401)	N/A
SIZE:	66	57	
STROKE: <i>mm</i>	BC0175.0	BZ 130.0	
TEST REPORT #:	N/A	7.66	
SPRING BRAKE FORCE: <i>kN</i>	N/A	5	
HOLDOFF PRESSURE: <i>Bar</i>	MERITOR	MERITOR	
FOUNDATION BRAKE:	74	74	N/A
LEVER LENGTH: <i>mm</i>	MAKE:	PART NUMBER:	PM PRESS. <i>kPa</i>
BRAKE VALVES:	WABCO	480 102 08.0 (MV)	80 kPa
ECU PART #:	WABCO	480 207 001 0 (24V)	80 kPa
3RD MODULATOR #:	YES		
ANTI-COMPOUNDING:	SEALCO_SBR	110701	
SPRING BRAKE RELAY:	SEALCO_YR	17600B	
YARD RELEASE VALVE:	N/A	N/A	
INLINE RELAY FITTED:			
ECU DIRECTION:	<input checked="" type="checkbox"/> FRONT	<input type="checkbox"/> REAR	FRONT FRICTION: μ 0.51
SUBSYSTEMS:	<input type="checkbox"/> SMARTBOARD	<input type="checkbox"/> OPTI-LINK	<input type="checkbox"/> CAN ROUTER 446 122 050 0
	<input type="checkbox"/> ELEX 446 122 070 0	<input type="checkbox"/> TAILGUARD	

SUSPENSION

	FRONT	REAR
SUSPENSION TYPE:	PNEUMATIC	PNEUMATIC
MAKE:	ROR_AIRSPRING	ROR_AIRSPRING
MODEL:	ROR_INTRA	ROR_INTRA
BELLOW SIZE:	SLX LRC	SLX LRC
HEIGHT CONTROL VALVE:	HALDEX 90554950	HALDEX 90554950
OTHER VALVES:	NORGREN 3042402	NORGREN 3042402
RIDE HEIGHT <i>MM</i> :	250	250
HANGER HEIGHT <i>MM</i> :		
PEDESTAL HEIGHT <i>MM</i> :		
LIFT AXLE:		N/A
DUMP SWITCH:		PNEUMATIC
LIFT AXLE VALVE:		N/A
PRESSURE LIMITING:		N/A

AIR TANKS

AIR TANKS STANDARD:	SAE J10A / EN286-2	
BRAKE TANK SIZE: L	FRONT	REAR
	C51902, 48L	C51902, 48L
AUXILIARY TANK SIZE: L		C51901, 25L x 2
PRESSURE PROTECTION:	WABCO PEM: 461 513 002 0	

AIR LINES

TEST POINTS:		
CONTROL LINE:	FILTER X 1	TANK: ECU X 1
REAR CHAMBER:	ECU X 2	FRONT CHAMBER: LEFT 1st
DUOMATIC COLOUR CODED:	YES	

ELECTRONIC HEIGHT SENSOR CALIBRATION

	TIMER TICKS [F/R]	MILLIMETRE [F / R]
UPPER LEVEL:	<input type="text"/>	<input type="text"/>
NORMAL LEVEL:	<input type="text"/>	<input type="text"/>
LOWER LEVEL:	<input type="text"/>	<input type="text"/>

CHECKS AT COMMISSION OF VEHICLE

CHAMBER BUNGS REMOVED: VALVE MOUNTING:

ECU BLANKING PLUGS CHECKED:

RESPONSE TIME: MODULATOR 2.1 MODULATOR 2.2 RELAY VALVE

ms:	<input type="text" value="260"/>	<input type="text" value="270"/>	<input type="text" value="310"/>
-----	----------------------------------	----------------------------------	----------------------------------

NOTES AND SPECIAL CONDITIONS

3/12/2021 received est build schedule.15/12/2021 request to do project, receive drawings etc.
24/3/2022 start files, request and receive product and trailer data. 25/3/2022 do calculations
and ECU files, start paperwork.
29/03/2022 Advised air reservoirs changed. Redo paperwork to reflect change.

REASON FOR CERTIFICATION: NEW TRAILER

I UNDERSTAND AND DECLARE THAT I AM THE CERTIFIER IDENTIFIED BELOW AND HOLD A CURRENT VALID APPOINTMENT. I CERTIFY THAT AT THE TIME OF INSPECTION THE ABOVE MENTIONED VEHICLE COMPONENT DESIGN AND THIS CERTIFICATION COMPLIES IN ALL RESPECTS WITH THE LAND TRANSPORT RULE VEHICLE STANDARDS COMPLIANCE 2002 AND MY DEED OF APPOINTMENT. TO THE BEST OF MY KNOWLEDGE THE INFORMATION CONTAINED IN THIS CERTIFICATE IS TRUE AND CORRECT.

RULE / STD COMPLIED TO:

NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015, SCHEDULE 5, ADR 35, ECE R13, FMVSS 121

DATE: 8/09/2022

SIGNED: Lance Cawte

CERTIFIER NAME & ID: CHRIS CLARKE CJC

SODC BY: LANCE CAWTE LPC

PHONE (BUS): 09-980-7300

FAX:

POSTAL ADDRESS: P.O. Box 98-971, Manukau 2241
New Zealand