

| | |
|---|------------------|
| Heavy vehicle specialist inspector's or manufacturing inspecting organisation's name (PRINT IN CAPS) CHRIS CLARKE | ID CJC |
|---|------------------|

| | |
|-------------------------|--|
| Plate number (optional) | VIN/chassis number 7 A 9 E 2 0 0 1 0 N 2 0 2 3 2 3 5 |
|-------------------------|--|

| | |
|---------------------------------------|---|
| Make DOMETT | Component being certified: <input type="checkbox"/> Chassis <input type="checkbox"/> Load anchorage |
| Model (optional) E2001 PH | <input type="checkbox"/> Log bolsters <input type="checkbox"/> Towing connection <input checked="" type="checkbox"/> Brakes |
| Certification category HVEK | <input type="checkbox"/> SRT <input type="checkbox"/> PSV stability <input type="checkbox"/> PSV rollover |
| | <input type="checkbox"/> Swept path <input type="checkbox"/> PBS |

Description of work

CERTIFY TO SCHEDULE 5 OF LTR 32015: NZ HEAVY VEHICLE BRAKE SPECIFICATION.
CARRY OUT BRAKE CALCULATIONS, INSPECTION AND ECU END OF LINE PROTOCOL.
5AFT CURTAINSIDE **RSS ON TYRE: 265 70 R19.5**
FOR SYSTEM ARCHITECTURE, PLEASE REFER TO PDS WORKSHEET & SCHEMATIC.
REASON FOR CERTIFICATE: NEW TRAILER BUILD

| | |
|---|---|
| Code/standard/rule certified to LTR 32015 | Component load rating(s) 32 Tonnes GVM |
| General drawing number(s) N/A | 16 Tonne (Front brake mass) 19 Tonne (Rear brake mass) |

| | |
|-------------------------------|-----------------|
| Supporting documents | |
| BRAKE RULE CERTIFICATE | JH230411 |
| BRAKE CALCULATION # | TP52526 |


Special conditions (optional)

WARNING LAMP MUST ILLUMINATE WHEN IGNITION IS SWITCHED ON & THEN EXTINGUISH IMMEDIATELY OR WHEN VEHICLE SPEED EXCEEDS 7 KM/H

| | | |
|---|----|---|
| Certification expiry date (if applicable) N/A [UNLESS MODIFIED] | or | Hubodometer reading (whichever comes first) |
|---|----|---|

Declaration

I the undersigned, declare that I am the heavy vehicle specialist inspector identified and I hold a current valid appointment. I certify that the above mentioned vehicle component's design, manufacture and installation, and this certification complies in all respects with the Land Transport Rule: Vehicle Standards Compliance 2002 and my appointment. To the best of my knowledge the information contained in the certificate is true and correct.
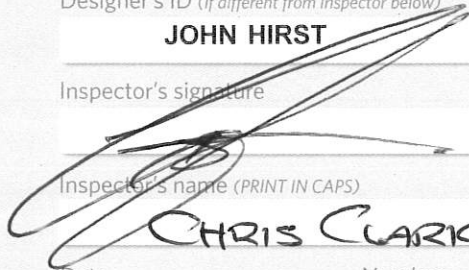
| | |
|---|-------------------------|
| Designer's ID (if different from inspector below) JOHN HIRST | J E H |
| Inspector's signature  | |
| Inspector's name (PRINT IN CAPS) CHRIS CLARKE | ID number CJC |
| Date 22.05.2023 | Number 872768 |

| | | |
|--|---|------|
| CoF vehicle inspector ID (if applicable) | CoF vehicle inspector signature (if applicable) | Date |
|--|---|------|


All fields are mandatory unless otherwise stated.

WABCO START-UP LOG

| | | | |
|---|--|-------------------|---------------|
| System | Trailer EBS-E | WABCO part number | 480 102 080 0 |
| Production date | 2023-03-31 | Serial number | 897043508200G |
| Serial number (modulator) | 000000570952 | | |
| Fingerprint Customer EOL / Customer Development / Flash Program | W503643 / 2023-05-22 ; 00000000 / 0000-00-00 ; 00000000 / 0000-00-00 | | |

WABCO TRAILER EBS-E

GGVS/ADR TUEH TB 2007 - 019.00
TDB0749

| | | | | | | | |
|---|--|-----|--|--|------|------|------|
| HERSTELLER MANUFACTURER CONSTRUCTEUR | DOMETT TRAILERS | | | GIO | Pin1 | Pin3 | Pin4 |
| TYP TYPE TYPE | 5AFT CURTAIN SIDE | | | 1 | --- | --- | --- |
| VEHICLE IDENT. NUMBER CHASSIS NUMBER NUMERO DE CHASSIS | 7A9E20010N2023235 | | | 2 | --- | --- | --- |
| BREMSBERECHNUNGS-NR. BRAKE CALCULATION NO. CALCUL DE FREINAGE NO. | TP52526A | | | 3 | ALS2 | ALS2 | --- |
| POLRADZAHNZAHL c-d e-f POLE WHEEL TEETH c-d e-f DENTS ROUE DENTEE c-d e-f | 90 | 90 | ABS-System ABS-System Système ABS | 4 | --- | --- | --- |
| | | | 4S/3M | 5 | DIAG | DIAG | DIAG |
| RSS RSS RSS | Einfachbereifung Single tire Monte simple | | Lenkachse Steering axle Essieu vireur | 6 | --- | --- | --- |
| | Zwillingsbereifung Twin tires / Super single Monte jumelée | X | Kippkritisches Fahrzeug Critical Trailer Vehicule critique | 7 | --- | --- | --- |
| Subsystems | SB | I/O | 24N |  | | | |


| ACHSE AXLE ESSIEU | pm (bar) | | 6.5 | | pm (bar) | | 0.7 | | 2.0 | | 6.5 | | TYP TYPE | (mm) | (mm) | (bar) | |
|-------------------------|----------|-----|----------|------|----------|-----|-----|-----|-----|---|---------|----|-------------|------|------|-------|--|
| | 1.0 | Pz | TR (daN) | | | | | | | | | | | | | | |
| 1 | 1550 | 0.7 | 2.0 | 8000 | 5.1 | 0.4 | 1.4 | --- | 5.9 | - | 20 | 65 | 69 | 504 | 4287 | | |
| 2 | 1550 | 0.7 | 2.0 | 8000 | 5.1 | 0.4 | 1.4 | --- | 5.9 | - | 20 | 65 | 69 | 504 | 4287 | | |
| 3 | 1300 | 0.5 | 1.7 | 6350 | 4.0 | 0.3 | 1.5 | --- | 4.8 | - | 14 / 16 | 64 | 69 | 484 | 2870 | | |
| 4 | 1300 | 0.5 | 1.7 | 6350 | 4.0 | 0.3 | 1.5 | --- | 4.8 | - | 14 / 16 | 64 | 69 | 484 | 2870 | | |
| 5 | 1300 | 0.5 | 1.7 | 6350 | 4.0 | 0.3 | 1.5 | --- | 4.8 | - | 14 | 64 | 69 | 484 | 2870 | | |

TEBS-E

| | | | |
|-----------------------|-------------|--------------------------------|------------|
| Diagnostic memory | OK | Warning lamp control | OK |
| Parameter setting | carried out | Stop light supply | OK |
| EBS pressure test | OK | Lifting axle test | Not tested |
| Redundancy test | OK | ECAS height sensor calibration | Not tested |
| ABS sensor assignment | OK | Height sensor axle load | Not tested |
| RTR test | Not tested | Leak test | Not tested |
| Immobilizer test | Not tested | Signal outputs | Not tested |
| Signal inputs | Not tested | Tag axle test | Not tested |

Electronic Extension Module

| | | | |
|-------------------|------------|----------------|------------|
| Diagnostic memory | Not tested | Signal outputs | Not tested |
| TailGUARDlight | Not tested | TailGUARD | Not tested |

| | | | |
|--------------|------------------------|---|-------------------|
| Manufacturer | DOMETT TRAILERS | Vehicle ident. no. | 7A9E20010N2023235 |
| Vehicle type | 5AFT CURTAIN SIDE | Odometer reading | 0.0 km |
| Next service | 0 km | Trip reading | 0.0 km |
| Tester | Chris Clarke |  | |
| Date | 2023-05-22 11:29:30 am | | |

trailer (full, semi-, centre-axle) with air brake system acc. to UN/ECE-R.13.11

distribution: DOMETT TRAILERS
 7A9E20010N2023235
 SODC: JH230411
 LT400: CJC 872768

please note!

This brake calculation is made under consideration of
 -the legal prescriptions mentioned above in the version valid at the time of making the program (V6.18.07.12).
 -the functional characteristics of our products as well as the data of the brake out of the test approvals of the axle manufacturers, and
 -the other vehicle data included in the brake calculation.
 Please check whether these data correspond to the actual vehicle data.
 Our conditions of delivery apply (particularly section 9.0).
 In any case we commend to do a braking harmonisation!
 WABCOBrake V6.18.07.12 db 31.08.2018

vehicle manufacturer: DOMETT TRAILERS
 trailer model : 5AFT CURTAIN SIDE
 trailer type : 5-axle-full-trailer
 remarks : air / hydraulic / VA suspension
 WABCO TRAILER - EBS E
 TRISTOP 3+4: T.14/24 [TSE1416HTLD64 ACTUALLY FITTED -
 SEE PAGE 7 FOR PERFORMANCE DATA]
 265/70 R 19,5

axle 1 + 2 + 3 + 4 + 5 : SAF, SBW 1937, TDB 0749 ECE,

| | | unladen | laden |
|--------------------------|----------|-------------|-------|
| total mass | P in kg | 7000 | 35050 |
| axle 1 | P1 in kg | 1550 | 8000 |
| axle 2 | P2 in kg | 1550 | 8000 |
| axle 3 | P3 in kg | 1300 | 6350 |
| axle 4 | P4 in kg | 1300 | 6350 |
| axle 5 | P5 in kg | 1300 | 6350 |
| wheel base | E in mm | 7450 - 7550 | |
| centre of gravity height | h in mm | 1016 | 2100 |

| | | axle 1 | axle 2 | axle 3 | axle 4 | axle 5 |
|-------------------------------------|----------------|----------|----------|----------|----------|----------|
| no. of combined axles | | 1 | 1 | 1 | 1 | 1 |
| no. of brake chambers per axle line | KDZ | 2 | 2 | 2 | 2 | 2 |
| The power output corresponds to | | BZ 122.1 | BZ 122.1 | BZ 119.6 | BZ 119.6 | BZ 122.1 |
| brake chamber manufacturer | | Meritor | Meritor | Meritor | Meritor | Meritor |
| chamber size | | 20. | 20. | T.14/24 | T.14/24 | 14. |
| lever length | lBh in mm | 69 | 69 | 69 | 69 | 69 |
| brake factor | [-] | 23.03 | 23.03 | 23.03 | 23.03 | 23.03 |
| dyn. rolling radius | rdyn min in mm | 421 | 421 | 421 | 421 | 421 |
| dyn. rolling radius | rdyn max in mm | 421 | 421 | 421 | 421 | 421 |
| threshold torque | Co Nm | 6.0 | 6.0 | 6.0 | 6.0 | 6.0 |

calculation:

| | | | | | | |
|---|-------------------|-------|-------|-------|-------|-------|
| chamber pressure(rdyn min)pH at z=22,5%bar | | 2.2 | 2.2 | 2.1 | 2.1 | 2.1 |
| chamber pressure(rdyn max)pH at z=22,5%bar | | 2.2 | 2.2 | 2.1 | 2.1 | 2.1 |
| chamber press.(servo)pcha at pm6,5bar bar | | 5.9 | 5.9 | 4.8 | 4.8 | 4.8 |
| piston force | ThA at pm6,5bar N | 6825 | 6825 | 4586 | 4586 | 4586 |
| brake force(rdyn min)T lad. at pm6,5bar N | | 51709 | 51709 | 34623 | 34623 | 34623 |
| brake force(rdyn max)T lad. at pm6,5bar N | | 51709 | 51709 | 34623 | 34623 | 34623 |
| Brake force incl. 1 % rolling resistance proportion | % | 22.3 | 22.3 | 18.5 | 18.5 | 18.5 |

braking rate z laden 0.603 for rdyn min
 z = sum (TR)/PRmax 0.603 for rdyn max

Trailer may only be operated in combination with trucks/tractors with ISO 7638 supply (5 or 7 polar).

brake diagram :

maximum pressure: 8.5 bar

axle 1:

valve 1: 971 002 ... 0 WABCO
 EBS emergency valve

valve 2: 480 207 0.. 0 WABCO or 480 207 2.. 0
 EBS relay valve

brake cylinder: Meritor 20HSCLD65

axle 2:

valve 1: 971 002 ... 0 WABCO
 EBS emergency valve

valve 2: 480 207 0.. 0 WABCO or 480 207 2.. 0
 EBS relay valve

brake cylinder: Meritor 20HSCLD65

axle 3:

valve 1: 971 002 ... 0 WABCO
 EBS emergency valve

valve 2: 480 102 ... 0 WABCO
 EBS trailer modulator

brake cylinder: Meritor 1424HTLD64

axle 4:

valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 102 ... 0 WABCO
EBS trailer modulator

brake cylinder: Meritor 1424HTLD64

axle 5:


valve 1: 971 002 ... 0 WABCO
EBS emergency valve

valve 2: 480 102 ... 0 WABCO
EBS trailer modulator


brake cylinder: Meritor 14HSCLD64

| | | | | | | | |
|-----------------------------|----------------|-------|-------|-------|-------|-------|-----|
| test type III (zIII = 0.30) | for rdyn min : | axle1 | axle2 | axle3 | axle4 | axle5 | |
| at pm 3.5 bar => | pcha in bar : | 2.9 | 2.9 | 2.6 | 2.6 | 2.6 | 2.6 |
| test type III (zIII = 0.06) | for rdyn min : | axle1 | axle2 | axle3 | axle4 | axle5 | |
| at pm 1.2 bar => | pcha in bar : | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 |


brake chamber pressure laden

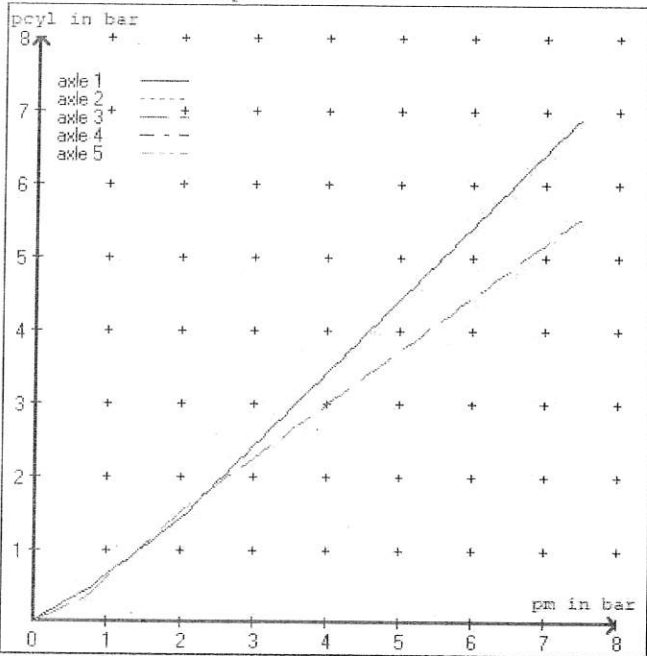


brake chamber pressure unladen

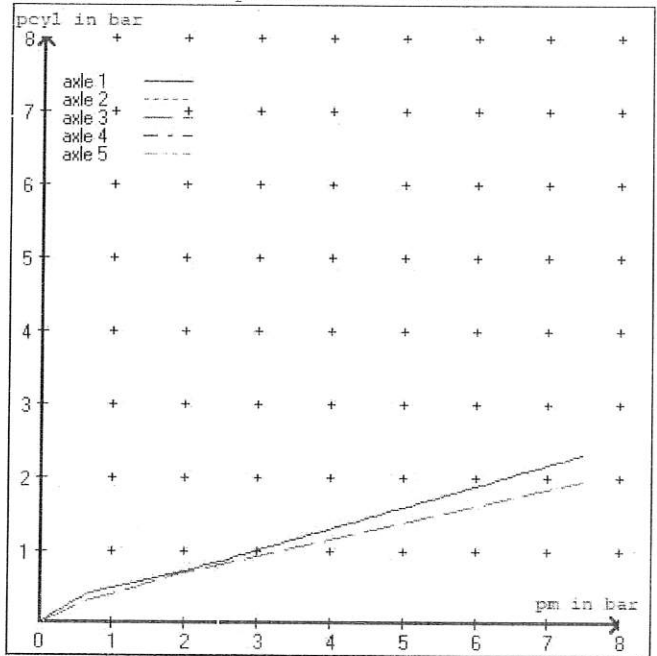


compatibility band laden

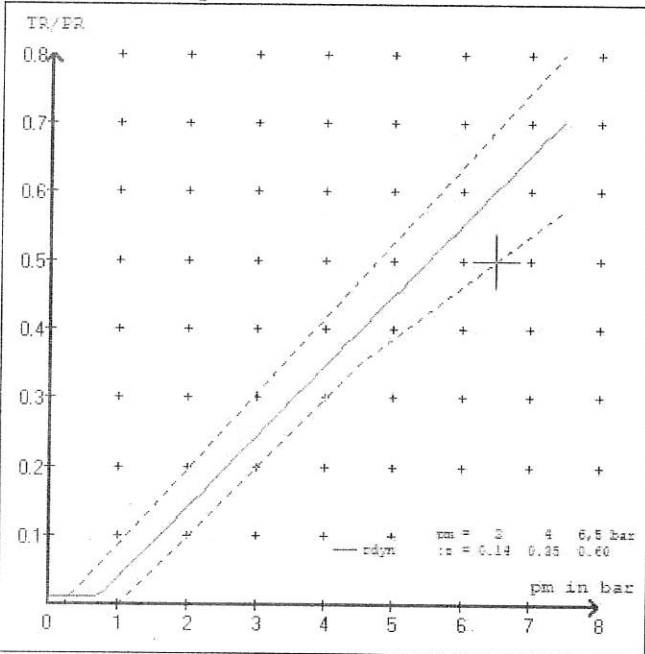


compatibility band unladen

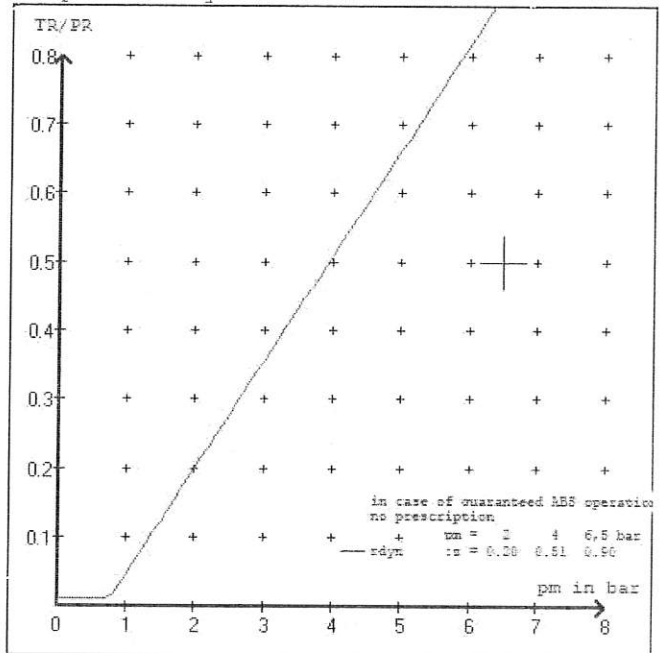

curves of friction laden

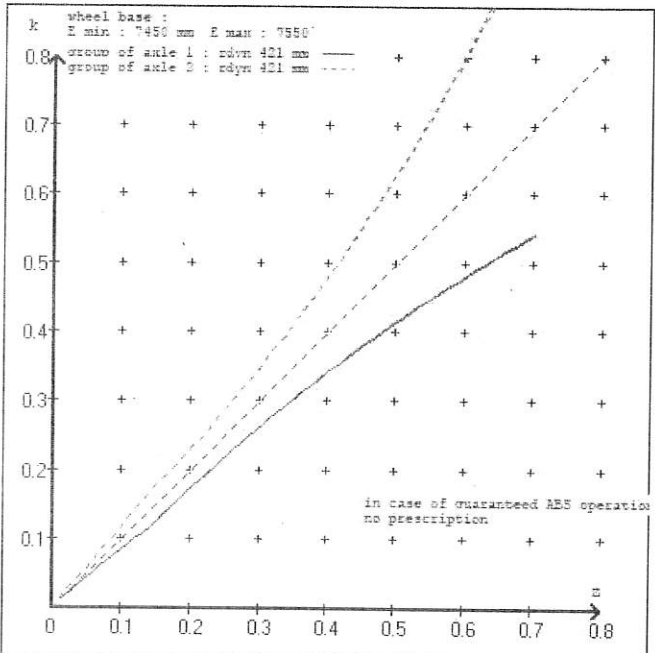

curves of friction unladen

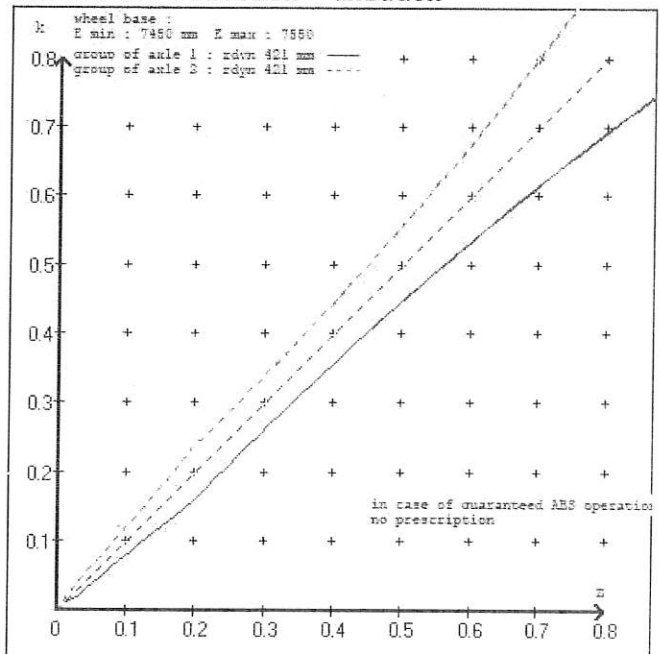

vehicle manufacturer: DOMETT TRAILERS
 trailer model : 5AFT CURTAIN SIDE
 trailer type : 5-axle-full-trailer

brake chamber and lever length :

axle 1 : 2 x type/diameter 20. (Meritor) lever length 69 mm
 axle 2 : 2 x type/diameter 20. (Meritor) lever length 69 mm
 axle 3 : 2 x type/diameter T.14/24 (Meritor) lever length 69 mm
 axle 4 : 2 x type/diameter T.14/24 (Meritor) lever length 69 mm
 axle 5 : 2 x type/diameter 14. (Meritor) lever length 69 mm

brake diagram :

valve :

971 002 ... 0 WABCO EBS emergency valve
 480 207 0.. 0 WABCO EBS relay valve or 480 207 2.. 0
 480 102 ... 0 WABCO EBS trailer modulator

EBS input data

=====

vehicle manufacturer: DOMETT TRAILERS
 trailer model : 5AFT CURTAIN SIDE
 trailer type : 5-axle-full-trailer
 brake calculation no. : TP 52526A

tire circumference main axle : 2650 for rdyn max
 tire circumference auxiliary axle : 2650 for rdyn max

assignment pm / deceleration z: pm 0.7 bar z = 0.010
 (laden condition) 2.0 bar z = 0.142
 6.5 bar z = 0.600

| control pressure pm | | 6,5 | | control pressure pm | | 0.7 | 2.0 | 6.5 |
|---------------------|-------------------|--|-------------------|---------------------|--|-----------------|-----|-----|
| axle | axle load unladen | bellow pr. unladen | brake pr. unladen | axle load laden | bellow pr. laden | brake pr. laden | | |
| 1 | 1550 | to be | 2.0 | 8000 | to be | 0.4 | 1.4 | 5.9 |
| 2 | 1550 | entered by the vehicle manufact. | 2.0 | 8000 | entered by the vehicle manufact. | 0.4 | 1.4 | 5.9 |
| 3 | 1300 | | 1.7 | 6350 | | 0.3 | 1.5 | 4.8 |
| 4 | 1300 | | 1.7 | 6350 | | 0.3 | 1.5 | 4.8 |
| 5 | 1300 | | 1.7 | 6350 | | 0.3 | 1.5 | 4.8 |
| | | | | | | | | |

The unladen values indicated in the above table are values for the basic parameter set. Higher unladen axle loads and liftaxles are automatically recognized and do not require separate adjustment. The above unladen axle loads must not be fallen below.

=====

| axle 1 | axle 2 | axle 3 | axle 4 | axle 5 |
|-----------|-----------|-----------|-----------|-----------|
| axle load | axle load | axle load | axle load | axle load |
| pcyl | pcyl | pcyl | pcyl | pcyl |
| 1550 | 1550 | 1300 | 1300 | 1300 |
| 2.0 | 2.0 | 1.7 | 1.7 | 1.7 |
| 2050 | 2050 | 1800 | 1800 | 1800 |
| 2.3 | 2.3 | 2.0 | 2.0 | 2.0 |
| 2550 | 2550 | 2300 | 2300 | 2300 |
| 2.6 | 2.6 | 2.3 | 2.3 | 2.3 |
| 3050 | 3050 | 2800 | 2800 | 2800 |
| 2.9 | 2.9 | 2.6 | 2.6 | 2.6 |
| 3550 | 3550 | 3300 | 3300 | 3300 |
| 3.2 | 3.2 | 2.9 | 2.9 | 2.9 |
| 4050 | 4050 | 3800 | 3800 | 3800 |
| 3.5 | 3.5 | 3.2 | 3.2 | 3.2 |
| 4550 | 4550 | 4300 | 4300 | 4300 |
| 3.8 | 3.8 | 3.5 | 3.5 | 3.5 |
| 5050 | 5050 | 4800 | 4800 | 4800 |
| 4.1 | 4.1 | 3.8 | 3.8 | 3.8 |
| 8000 | 8000 | 6350 | 6350 | 6350 |
| 5.9 | 5.9 | 4.8 | 4.8 | 4.8 |

data sheet to ECE vehicle type-approval certificate concerning braking equipment: according to ECE R13 annex 11

| | | |
|------------------------------|--------------|----------------------------|
| axle 1 : reference axle: SAF | SBW 1937 | brake lining: Jurid 539 |
| test report : | TDB 0749 ECE | date : 20130930 30.09.2013 |
| axle 2 : reference axle: SAF | SBW 1937 | brake lining: Jurid 539 |
| test report : | TDB 0749 ECE | date : 20130930 30.09.2013 |
| axle 3 : reference axle: SAF | SBW 1937 | brake lining: Jurid 539 |
| test report : | TDB 0749 ECE | date : 20130930 30.09.2013 |
| axle 4 : reference axle: SAF | SBW 1937 | brake lining: Jurid 539 |
| test report : | TDB 0749 ECE | date : 20130930 30.09.2013 |
| axle 5 : reference axle: SAF | SBW 1937 | brake lining: Jurid 539 |
| test report : | TDB 0749 ECE | date : 20130930 30.09.2013 |

calc. verific. of residual (hot) braking force type III
(item 4.2.1 of appendix 2 to annex 11)

| | | |
|--------|---------------|---------------|
| axle 1 | (rdyn 421 mm) | T = 24.2 % Fe |
| axle 2 | (rdyn 421 mm) | T = 24.2 % Fe |
| axle 3 | (rdyn 421 mm) | T = 18.2 % Fe |
| axle 4 | (rdyn 421 mm) | T = 18.2 % Fe |
| axle 5 | (rdyn 421 mm) | T = 18.2 % Fe |

calculated actuator stroke in mm
(item 4.3.1.1 of appendix 2 to annex 11)

| | | |
|--------|--------------|-----------|
| axle 1 | (sp = 58 mm) | s = 39 mm |
| axle 2 | (sp = 58 mm) | s = 39 mm |
| axle 3 | (sp = 56 mm) | s = 39 mm |
| axle 4 | (sp = 56 mm) | s = 39 mm |
| axle 5 | (sp = 56 mm) | s = 39 mm |

average thrust output in N at pm = 6,5 bar (however max. pcha = 7,0 bar)

| | |
|-------|--------------|
| axle1 | ThA = 6825 N |
| axle2 | ThA = 6825 N |
| axle3 | ThA = 4586 N |
| axle4 | ThA = 4586 N |
| axle5 | ThA = 4586 N |

calc. residual (hot) braking force in N
(item 4.3.1.4 of appendix 2 to annex 11)

| | | |
|--------|---------------|-------------|
| axle 1 | (rdyn 421 mm) | T = 40393 N |
| axle 2 | (rdyn 421 mm) | T = 40393 N |
| axle 3 | (rdyn 421 mm) | T = 27098 N |
| axle 4 | (rdyn 421 mm) | T = 27098 N |
| axle 5 | (rdyn 421 mm) | T = 27098 N |

| | |
|-------------|--------------|
| basic test | type III |
| of subject | (calculated) |
| trailer (E) | residual |
| | (hot)braking |
| | 0.47 |

braking rate of the vehicle
(item 4.3.2 to appendix 2 to annex 11)

0.60

required braking rate
(items 1.5.3 and 1.7.2 to annex 11)

>= 0,4 and
>= 0,6*E (0.36)

| | | |
|--------|---------------|-------------|
| axle 1 | (rdyn 421 mm) | T = 40393 N |
| axle 2 | (rdyn 421 mm) | T = 40393 N |
| axle 3 | (rdyn 421 mm) | T = 27098 N |
| axle 4 | (rdyn 421 mm) | T = 27098 N |
| axle 5 | (rdyn 421 mm) | T = 27098 N |

| | |
|-------------|--------------|
| basic test | type III |
| of subject | (calculated) |
| trailer (E) | residual |
| | (hot)braking |
| | 0.47 |

braking rate of the vehicle
(item 4.3.2 to appendix 2 to annex 11)

0.60

required braking rate
(items 1.5.3 and 1.7.2 to annex 11)

>= 0,4 and
>= 0,6*E (0.36)

spring parking brake

| | <u>axle 3</u> | <u>axle 4</u> |
|---|---------------|---------------|
| no of TRISTOP-actuators per axle line KDZ | 2 | 2 |
| TRISTOP-actuator type | T.14/16 | T.14/16 |
| lever length | 69 | 69 |
| stat. tyre radius | 401 | 401 |
| at a stroke of | 30 | 30 |
| min. force of spring brake | 6160 | 6160 |
| sp.brake chamber no Meritor..... | 4 | 4 |
| release pressure | 4.8 | 4.8 |

calculation:

| | | |
|--|--------|--------|
| ratio until road | 3.9674 | 3.9674 |
| $iFb = lBh * \eta * C * rBt / (rBn * rstat)$ | | |
| for rstat in mm | 401 | 401 |
| brake force of spring br. Tf in N | 48188 | 48188 |
| $Tf = (TFZ * KDZ - 2 * Co / lBh) * iFb$ | | |
| braking rate | 0.290 | |
| zf = sum (Tf) / P + 0,01 | | |

Test of the frictional connection required by the parking brake

minimum wheelbase/minimum supporting width min Ef necessary to fulfil the regulations

$$\min Ef = E * (1 - PR/P + zferf * h/E) / (1 - zferf / (fzul * nf/ng))$$

min Ef = 5704 mm for E = 7450 mm

min Ef = 5773 mm for E = 7550 mm

min Ef = minimum distance between front axle(s) (trailer) or support (semitraile) and the rear axle(s) (resultant of the bogie)

E = wheel base

fzul = 0.80 maximum permissible frictional connection required

zferf = 0.18 maximum required braking ratio of the parking brake

h = 2100 mm height of center of gravity - laden

PR = 19050 kg maximum bogie mass - laden

P = 35050 kg maximum total mass - laden

nf = 2 no. of axle(s) with TRISTOP spring brake actuators

ng = 3 no. of bogie axle(s)


reference values


reference values for z = 50% for max rdyn: 421 mm

| | pz [bar] | T [N] | T [N] |
|--------|----------|-------|-------|
| axle 1 | 1.0 | 5045 | |
| | 5.9 | 42876 | |
| axle 2 | 1.0 | 5045 | |
| | 5.9 | 42876 | |
| axle 3 | 1.0 | | 4848 |
| | 4.8 | | 28709 |
| axle 4 | 1.0 | | 4848 |
| | 4.8 | | 28709 |
| axle 5 | 1.0 | | 4848 |
| | 4.8 | | 28709 |

VIN - no.:

| | Axle(s) / Achse(n) | | | | |
|---|--------------------|-------|---------|---------|-------|
| brake cylinder type (service / parking) Bremszylinder Typ (Betrieb / Fest) | 20./ | 20./ | T.14/24 | T.14/24 | 14./ |
| Maximum stroke smax = ...mm maximaler Hub smax =mm | 65 | 65 | 64 | 64 | 64 |
| Lever length =mm Hebellänge =mm | 69.08 | 69.08 | 69.08 | 69.08 | 69.08 |

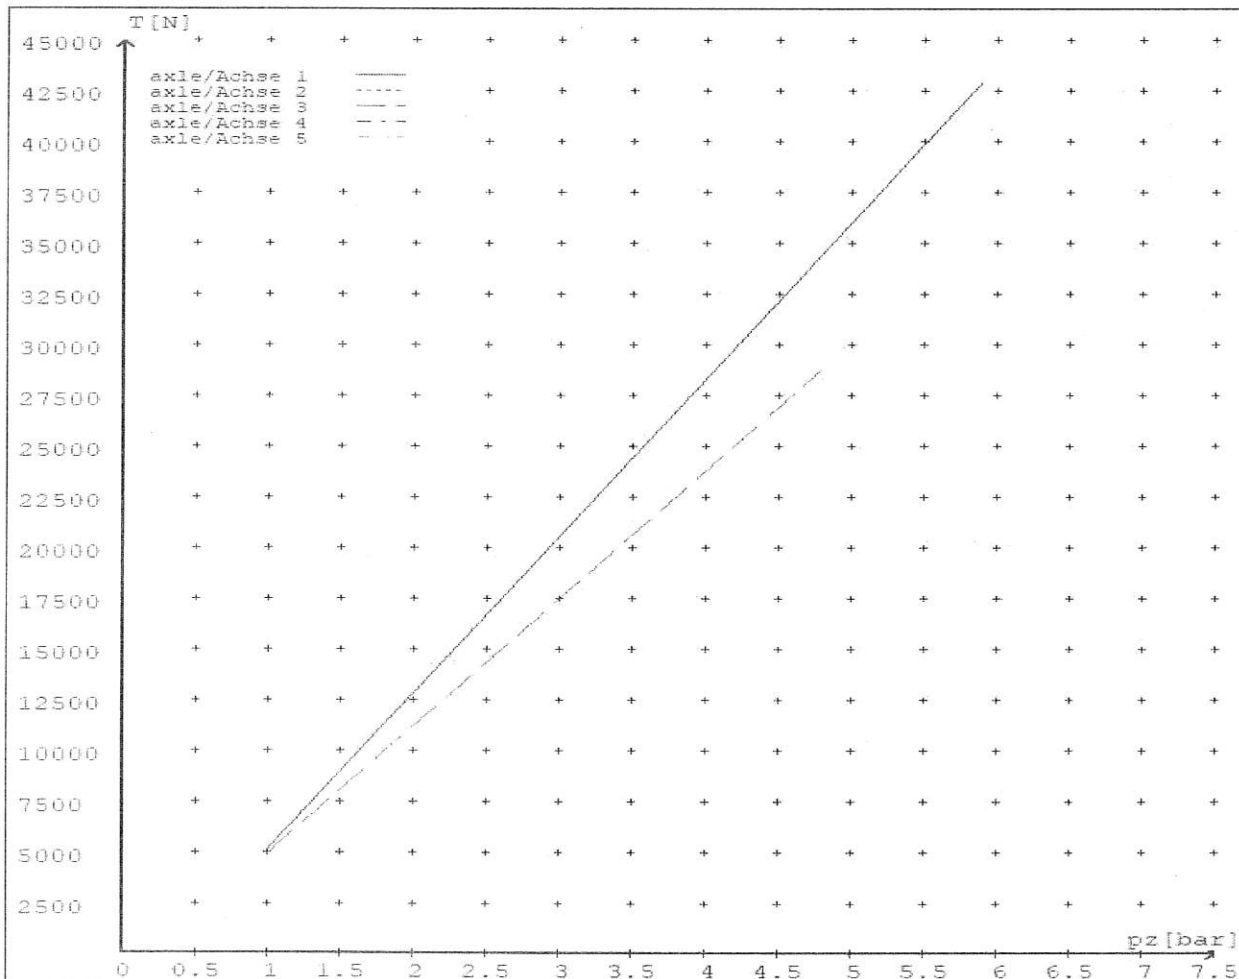



NOTICE TO VEHICLE OPERATOR

THIS VEHICLE HAS A BRAKE SYSTEM WHICH HAS BEEN DESIGNED AND FITTED IN ACCORDANCE WITH THE LAND TRANSPORT HEAVY VEHICLE BRAKE RULE 32015.

IF THIS VEHICLE IS OPERATED IN CONJUNCTION WITH NON-CERTIFIED VEHICLES, THERE MAY BE OPERATIONAL FACTORS WHICH NEED TO BE TAKEN INTO CONSIDERATION.

PLEASE REFER TO THE CERTIFIER FOR FURTHER INFORMATION.

EXCERPT FROM LAND TRANSPORT RULE; HEAVY-VEHICLE BRAKES RULE 32015.

10.1 RESPONSIBILITIES OF OPERATORS

A person who operates a vehicle must ensure that the vehicle complies with this rule.

10.2 RESPONSIBILITIES OF REPAIRERS

A person who repairs or adjusts a brake must ensure that the repair or adjustment:

- a) does not prevent the vehicle from complying with this rule;
- b) complies with Land Transport Rule: Vehicle Repair 1998.

10.3 RESPONSIBILITIES OF MODIFIERS

A person who modifies a vehicle so as to affect the braking performance of the vehicle must:

- a) ensure that the modification does not prevent the vehicle from complying with this Rule; and
- b) notify the operator that the vehicle must be inspected and, if necessary, certified by person or organisation appointed to carry out specialist inspection and certification of heavy vehicle brakes.

IF YOU ARE UNSURE ABOUT YOUR RESPONSIBILITIES, PLEASE CONTACT THE VEHICLE MANUFACTURER, OR MYSELF.

COMPLAINTS. Complaints and Warranty issues which relate to Brake Certification will be acknowledged within 7 working days and a resolution proposed within 25 working days. Resolution of complaints and Warranty issues is subject to Transpecs Warranty policy. Customers have the right to appeal to the New Zealand Transport Agency if dissatisfied with a Compliance issue. (Refer NZTA Notice Of Appointment Para 47.4) NZTA Helpdesk 0800 108 809

(J.Hirst (JEH) HVEK)



NOTICE TO VEHICLE OPERATOR

This trailer is equipped with an Electronic Brake System.

To comply with the New Zealand Heavy Vehicle Brake Rule 32015, it must be used only in conjunction with a truck/tractor equipped with a 5 or 7 pin ABS/EBS power supply socket.


Failure to connect to such supply invalidates Brake Rule compliance.

The trailer ABS/EBS warning light on the towing vehicle dashboard must illuminate when the ignition is switched on and extinguish when the vehicle is in motion.

If the light does not illuminate when ignition is switched on, the system must be checked. If the light remains illuminated when the vehicle is in motion, Brake Rule compliance is compromised. Repairs must be made as soon as possible.

If you are unsure of your responsibilities and/or obligations, please contact either the vehicle manufacturer or myself.

J E Hirst
(JEH HVEK)
(09 980 7300)



NOTICE TO VEHICLE OPERATOR

WABCO Park Release Emergency Valve (PREV)

This trailer is equipped with a WABCO PREV
Part # 971 002 900 0

Application of the park brake via the cab control valve will actuate and apply all service brakes on the trailer. In the event of a leak in the service brake system the Spring Brakes will automatically override and hold the vehicle in compliance to Land Transport Rule: Heavy-vehicle Brakes Rule 32015.

When the vehicle is presented for COF the trailer park brake system is tested by pulling the red actuation knob on the PREV, situated mid way down the chassis rail. The cab control in the prime mover does not have to be applied for this test procedure.

If you are unsure of any aspect relating to this instruction please contact either the vehicle manufacturer or myself.

J E Hirst
(JEH HVEK)
(09 980 7300)



**NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015
WORKSHEET, PROCEDURE DOCUMENTATION SHEET
& CONFIRMATION OF COMPLIANCE**

CLIENT

| | |
|----------------------|--------------------------------|
| MANUFACTURER: | DOMETT TRAILERS |
| ADDRESS: | TAURIKURA DRIVE, TAURANGA 3110 |
| FLEET: | T R GROUP |

VEHICLE DETAILS

| | | | |
|----------------------------------|----------------------|-----------------------|----------------------|
| VEHICLE TYPE: | 5AFT CURTAINSIDE | CERT #: | JH230411 |
| YEAR: | 2023 | CALCULATION #: | TP52526 |
| MAKE: | DOMETT | REGO #: | N/A |
| MODEL: | E2001 PH | LT400 #: | 872768 |
| CHASSIS #: | 2235 | ORDER #: | 9110 |
| VIN #: | 7A9E20010N2023235 | | |
| GVM: t | 32 | PRIME MOVER: | UNKNOWN |
| LOAD CONFIGURATION: | MIXED FREIGHT | | |
| GROUP RATINGS: t | FRONT | REAR | |
| | 16 | 19 | |
| WHEEL BASE: m | 7.5 | | |
| | UNLADEN COG m | MAX HEIGHT m | HEIGHT DECK m |
| | 1.016 | 4.3 | 1.09 |
| COG: m | 2.073 | | |
| | FRONT | REAR | TOTAL |
| TARE: t | 3.1 | 4 | 7.1 |
| | FRONT | REAR | |
| TYRE SIZE: | 265 70 R19.5 | 265 70 R19.5 | |
| ROLLING CIRCUMFERENCE: mm | 2645 | 2645 | |
| AXLE SPACING: m | 1.31 | 2.6 | |

BRAKE & AXLE DETAILS

| | MAKE | MODEL | TEST REPORT |
|-------------------|-----------|------------------|-------------|
| AXLE: | SAF | SAF-ZI9W | TDB0749 |
| POLE WHEEL FRONT: | 90 | POLE WHEEL REAR: | 90 |
| LINING MATERIAL: | JURID 539 | BRAKE FACTOR: | 23.03 |
| SENSED AXLE(S): | # 2 + 4 | NOTES: | |
| SERIAL NUMBERS: | 1 | N/A | SAF NG-IU28 |
| | 2 | N/A | SAF NG-IU28 |
| | 3 | N/A | SAF NG-IU28 |
| | 4 | N/A | SAF NG-IU28 |
| | 5 | N/A | SAF NG-IU28 |

CHAMBER AND VALVING DETAILS

| CHAMBERS: | AXLE 1 & 2 | AXLE 3 & 4 | AXLE 5 |
|------------------------------|---|---|---|
| BRAND: | TSE_CHAMBERS | TSE_CHAMBERS | TSE_CHAMBERS |
| SIZE: | 20HSCLD | 1416HTLD | 14HSCLD |
| STROKE: <i>mm</i> | 65 | 64 | 64 |
| TEST REPORT #: | BC 0041.0 Jul '07 | BC0143.0 | BZ 122.1 Sep '00 |
| SPRINGBRAKE FORCE: <i>kN</i> | N/A | 6.16 | N/A |
| HOLDOFF PRESSURE: <i>Bar</i> | N/A | 4.8 | N/A |
| FOUNDATION BRAKE: | WABCO PAN19 | WABCO PAN19 | WABCO PAN19 |
| LEVER LENGTH: <i>mm</i> | 69 | 69 | 69 |
| BRAKE VALVES: | MAKE: | PART NUMBER: | PM PRESS. <i>kPa</i> |
| ECU PART #: | WABCO | 480 102 08. 0 (MV) | 70 kPa |
| 3RD MODULATOR #: | WABCO | 480 207 202 0 (12V) | 70 kPa |
| ANTI-COMPOUNDING: | YES | | |
| SPRING BRAKE RELAY: | WABCO_PREV | 971 002 900 0 | |
| YARD RELEASE VALVE: | WABCO-PREV | 971 002 900 0 | |
| INLINE RELAY FITTED: | N/A | N/A | |
| ECU DIRECTION: | <input checked="" type="checkbox"/> FRONT <input type="checkbox"/> REAR | FRONT FRICTION: μ | 0.48 |
| SUBSYSTEMS: | <input type="checkbox"/> SMARTBOARD | <input type="checkbox"/> OPTI-LINK | <input type="checkbox"/> CAN ROUTER 446 122 050 0 |
| | <input type="checkbox"/> ELEX 446 122 070 0 | <input type="checkbox"/> TAILGUARD | |

SUSPENSION

| | FRONT | REAR |
|-----------------------------|-----------------|-----------------|
| SUSPENSION TYPE: | PNEUMATIC | PNEUMATIC |
| MAKE: | SAF_AIRSPRING | SAF_AIRSPRING |
| MODEL: | SAF_INTRA | SAF_INTRA |
| BELLOW SIZE: | 2619, 300mm | 2619, 300mm |
| HEIGHT CONTROL VALVE: | HALDEX 90554950 | HALDEX 90554950 |
| OTHER VALVES: | N/A | N/A |
| RIDE HEIGHT <i>mm</i> : | 260 | 260 |
| HANGER HEIGHT <i>mm</i> : | 200 | 200 |
| PEDESTAL HEIGHT <i>mm</i> : | 50 | 50 |
| LIFTAXLE: | | N/A |
| TIPPING DUMP SWITCH: | | N/A |
| LIFTAXLE VALVE: | | N/A |
| PRESSURE LIMITING: | | N/A |

AIR TANKS

| AIR TANKS STANDARD: | SAE J10A / EN286-2 | |
|-------------------------------|--------------------------|---------|
| | FRONT | REAR |
| BRAKE TANK SIZE: <i>L</i> | 46 | 46 + 25 |
| AUXILLARY TANK SIZE: <i>L</i> | N/A | 46 |
| PRESSURE PROTECTION: | WABCO PEM: 461 513 002 0 | |

AIR LINES

TEST POINTS:

| | | | |
|------------------------|-----|----------------|-----|
| CONTROL LINE: | X 1 | TANK: | X 1 |
| REAR CHAMBER: | X 2 | FRONT CHAMBER: | X 1 |
| DUOMATIC COLOUR CODED: | YES | | |

CHECKS AT COMMISSION OF VEHICLE

CHAMBER BUNGS REMOVED:

VALVE MOUNTING:

ECU BLANKING PLUGS CHECKED:

RESPONSE TIME:

MODULATOR 2.1

MODULATOR 2.2

RELAY VALVE

ms:

195

200

355

NOTES AND SPECIAL CONDITIONS

FILES RECEIVED: 05.10.2022

FILES CREATED & SENT TO CJC: 12.04.2023

FILES RETURNED AS COMPLETE:

REASON FOR CERTIFICATION: NEW TRAILER BUILD

I UNDERSTAND AND DECLARE THAT I AM THE CERTIFIER IDENTIFIED BELOW AND HOLD A CURRENT VALID APPOINTMENT. I CERTIFY THAT AT THE TIME OF INSPECTION THE ABOVE MENTIONED VEHICLE COMPONENT DESIGN AND THIS CERTIFICATION COMPLIES IN ALL RESPECTS WITH THE LAND TRANSPORT RULE VEHICLE STANDARDS COMPLIANCE 2002 AND MY DEED OF APPOINTMENT. TO THE BEST OF MY KNOWLEDGE THE INFORMATION CONTAINED IN THIS CERTIFICATE IS TRUE AND CORRECT.

TRAILER CERTIFIED TO THE NEW ZEALAND HEAVY VEHICLE BRAKE RULE 32015 VIA SCHEDULE 5.

DATE: 22/05/2023

SIGNED:

CERTIFIER NAME & ID:

CHRIS CLARKE

CJC

SODC BY:

JOHN HIRST

JEH

PHONE (BUS):

09-980-7300

FAX:

POSTAL ADDRESS:

P.O. Box 98-971, Manukau 2241
New Zealand